

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 10-030183
(43)Date of publication of application : 03.02.1998

(51)Int. Cl.

G23C 14/56
H01L 21/3065
H01L 21/68

(21)Application number : 08-190916
(22)Date of filing : 19.07.1996


(71)Applicant : TOKYO OHKA KOGYO CO LTD
(72)Inventor : HORI HISASHI
OBUCHI KAZUTO
MATSUSHITA ATSUSHI
SAKAMOTO KAORU

(54) TREATING DEVICE FOR SUBSTRATE HAVING LOAD LOCKING CHAMBER

(57)Abstract:

PROBLEM TO BE SOLVED: To efficiently execute a treatment by diminishing the volume of the load locking chamber of a treating device having the load locking chamber.

SOLUTION: A handler unit 12 which carries substrates W into a treating chamber 2 and ejects the substrates W out of the inside of the treating chamber 2 is arranged in the load locking chamber 4. This handler unit 12 is constituted by freely turnably supporting the base ends of two pieces of upper and lower curved arms 14 at a shaft 13 within a horizontal plane and providing the front ends of the respective arms 14 with hand parts 15. These hand parts 15 are formed to an approximate circular shape and projecting lines holding the substrates W are formed at their peripheral edges.

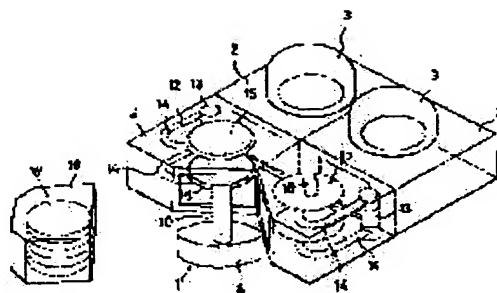

LEGAL STATUS

[Date of request for examination] 25.08.2000
[Date of sending the examiner's decision of rejection]
[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]
[Date of final disposal for application]
[Patent number]
[Date of registration]
[Number of appeal against examiner's decision of rejection]
[Date of requesting appeal against examiner's decision of rejection]
[Date of extinction of right]